




COMET Round 2 | Photograph: Tons Lightology Inc.

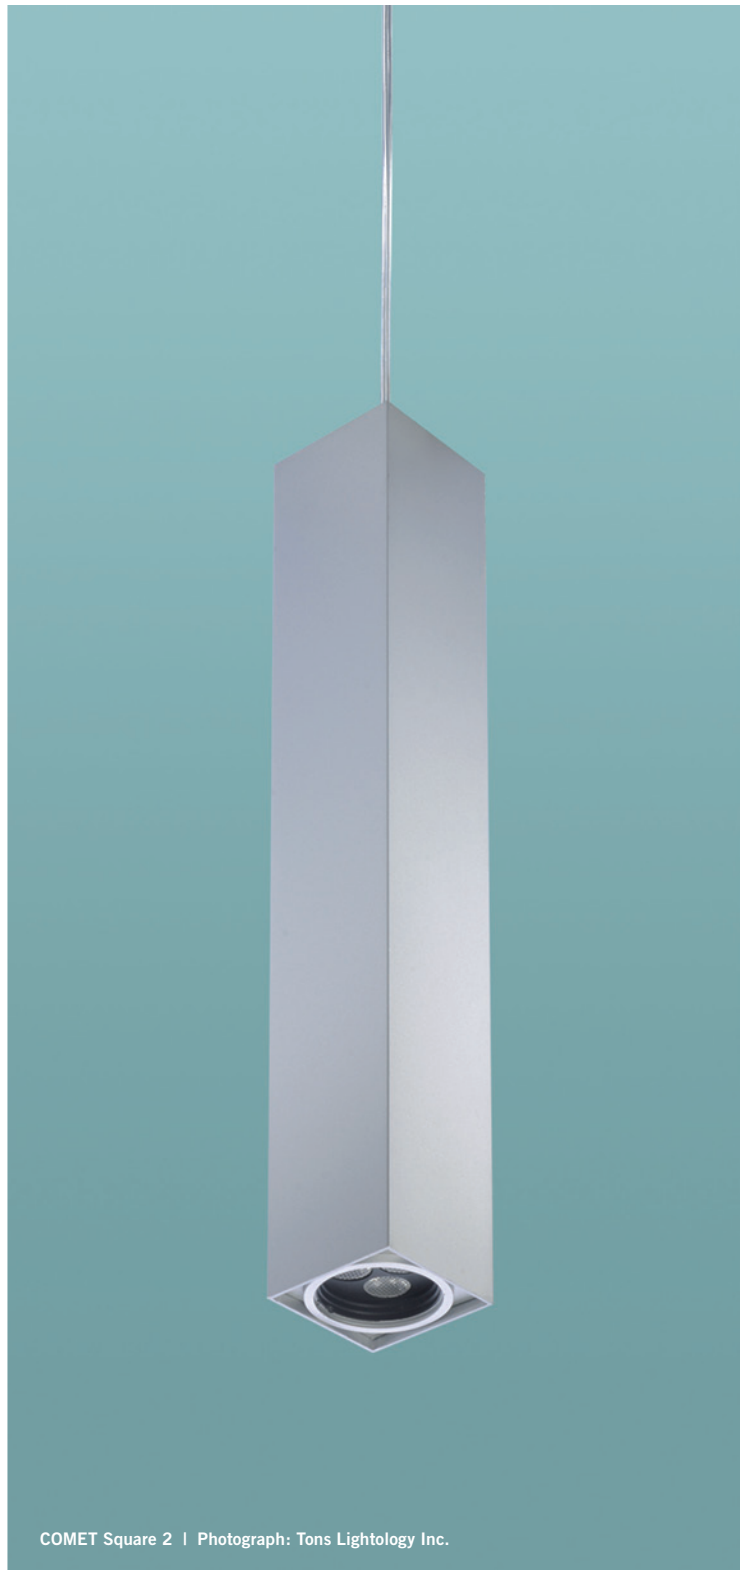

COMET Square 2 | Photograph: Tons Lightology Inc.

COMET



COMET. Timeless forms. Timely technology.

COMET's tastefully slim cylindrical and rectangular pendants give specifiers a choice of basic architectural forms, each delivering the same eco-friendly downlight with minimal high-angle glare. Both COMET Round and Square (3-LED fixtures) are available in 10" and 16" lengths. COMET Square 3 extends your choice to a slim 20" fixture and features an acrylic bottom lens for added sparkle in a space. Whether lighting counters, tables, or featured items – in commercial or residential environments – COMET imparts a 20-degree spread of remarkably smooth, symmetrical LED light. Finished in matte silver, COMET pendants coordinate with PILLAR wall-mounted fixtures to offer the same pleasing design aesthetic when illuminating horizontal and vertical surfaces.



COMET Round 1



COMET Round 2



COMET Square 1



COMET Square 2



COMET Square 3



Canopy for COMET Round/Square 1 & 2



Canopy for COMET Square 3

Product details.

- Round or square shape
- COMET Round/Square 1 is 10" long and COMET Round/Square 2 is 16" long
- Integral black baffle minimizes high-angle glare in COMET Round/Square 1 and 2
- 20" COMET Square 3 has an acrylic bottom lens to add sparkle to a space
- LED color is Warm White (3000K)

CONSTRUCTION	Fixture body and LED housing are constructed of machined aluminum.
FINISH	Fixture is finished in proprietary thermopainted matte silver (RAL9006).
SHIELDING	Integral 20-degree spread lens for each LED chip. In addition, a painted black baffle is included in COMET Round/Square 1 and 2 to minimize high-angle glare. COMET Square 3 includes an acrylic bottom lens.
ELECTRICAL	120V. Integral 3.6W LED driver for COMET Round/Square 1 and 2. 3.6W LED driver for COMET Square 3 is located in the canopy.
MOUNTING	Fixture is mounted to provided canopy with fully adjustable clear power cord. Canopy mounts to a standard octagonal junction box. Maximum cord length is 72".

See product specification sheets at www.energielighting.com for complete details.


					
	COMET Round 1	COMET Round 2	COMET Square 1	COMET Square 2	COMET Square 3
					
Catalog Number Prefix	CMR1	CMR2	CMS1	CMS2	CMS3
Dimmable	Yes ¹	Yes ¹	Yes ¹	Yes ¹	Yes ¹
Indirect % / Direct %	0% / 100%	0% / 100%	0% / 100%	0% / 100%	0% / 100%
Lamp	(3) 1.2W Osram Oslon LED chips	(3) 1.2W Osram Oslon LED chips	(3) 1.2W Osram Oslon LED chips	(3) 1.2W Osram Oslon LED chips	(1) 1.2W Osram Oslon LED chip
Beam Spread	20-degree lens	20-degree lens	20-degree lens	20-degree lens	20-degree lens
LED Colors Available	Warm White (3000K)	Warm White (3000K)	Warm White (3000K)	Warm White (3000K)	Warm White (3000K)
Light Output (Lumens)	192	192	192	192	41
System Watts	4.8	4.8	4.8	4.8	1.6
Lumens per Watt (Efficacy)	39.8	39.8	39.8	39.8	25.5
CRI	> 80	> 80	> 80	> 80	> 80
LED Rated Life²	50,000 hours	50,000 hours	50,000 hours	50,000 hours	50,000 hours
Warranty	5 years	5 years	5 years	5 years	5 years

¹Consult factory concerning dimming availability.


²Rated life to 70% lumen output, per LED supplier's data sheet.

Dimensions.


COMET Round 1

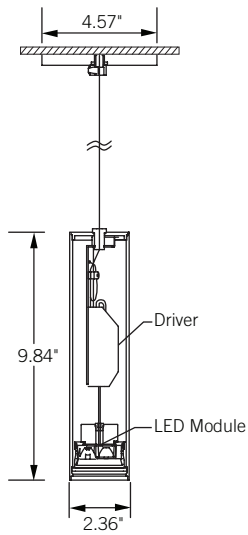


COMET Round 2

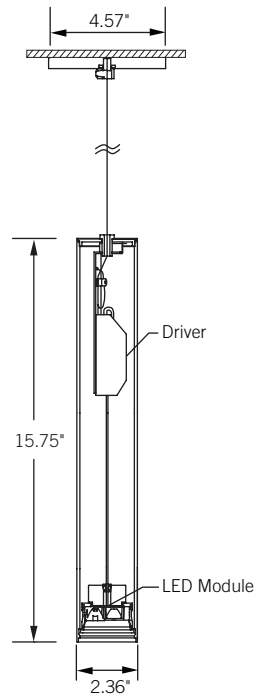

COMET Square 1

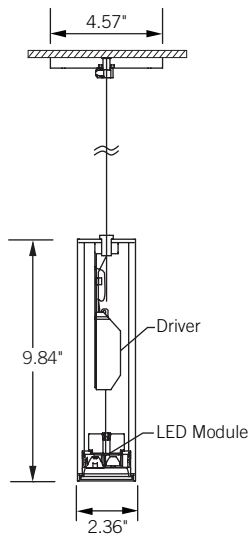

COMET Square 2

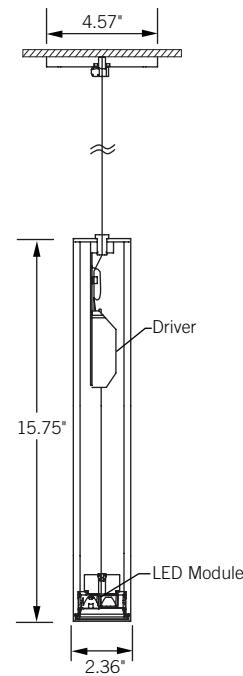

COMET Square 3

