



Pendant Mount Feed Kit Contents

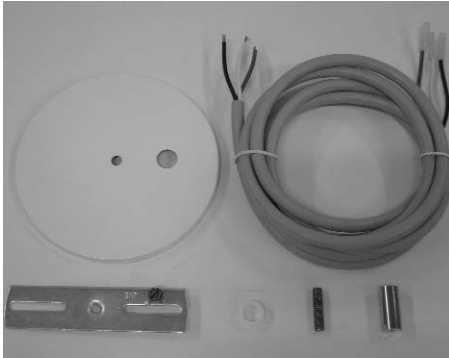


PENDANT MOUNT FEED KIT CONTENTS:

- One (1) 1/4-20 Barrel Nut
- One (1) 4-15/16" Ceiling Canopy
- One (1) Plastic Bushing
- One (1) 8' SJT Cord w/ Connectors (1) End
- One (1) 4-3/16" L Cross Bar
- One (1) 1/4-20 x 1" Stud

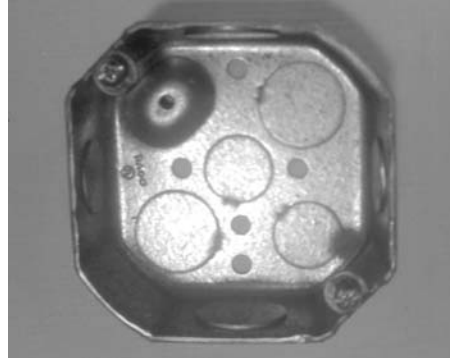

SUPPLIED BY CONTRACTOR:

- One (1) Octagonal Junction Box

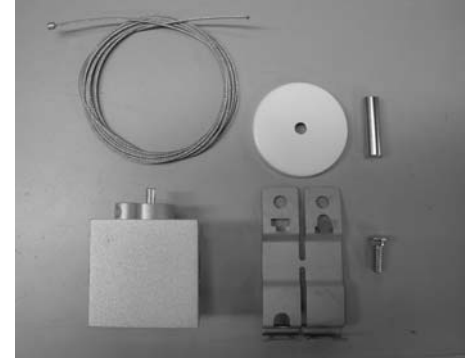


PENDANT MOUNT JOINER/ END KIT CONTENTS:


- One (1) End or Joiner Block
- One (1) 2" Canopy
- One (1) 72" 3/32 Aircraft Cable with Swaged End
- One (1) 1/4-20 Barrel Nut
- One (1) Caddy IDS with 1/4-20 Stud

Note: Luminaire must be tied to structure per local requirements.


Pendant Mount Feed Kit Installation Instructions

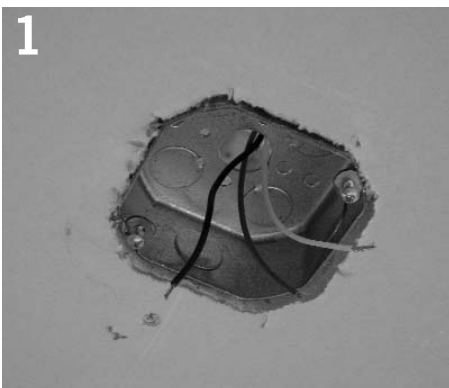

1
Install 4" octagonal junction box into ceiling.

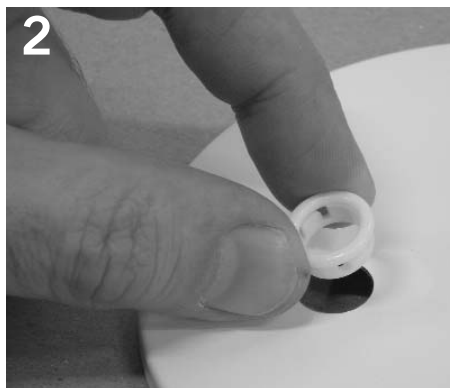

2
Insert bushing into feed canopy.

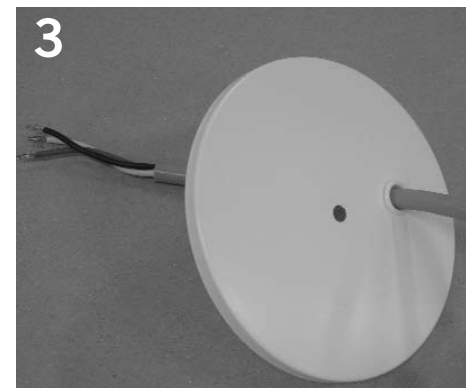


3
Slide power cord through feed canopy and make electrical connections to pre-installed junction box.

Product to be installed by qualified electrician only.

PART #04040646-01 REV .01

Pendant Mount Feed Kit Installation Instructions continued...

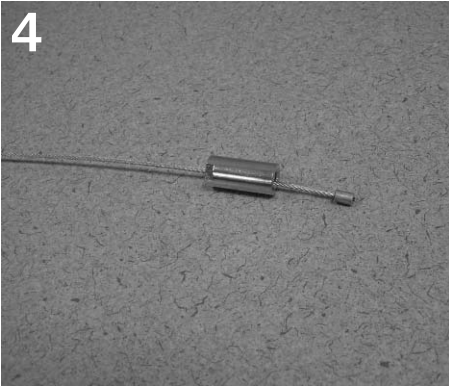

4
Insert swaged suspension cable through threaded barrel.




5
Secure feed canopy to 1/4-20 x 1 1/2" length stud with threaded barrel.

NO LIMIT PENDANT

énergie


Electrical Feed Installation

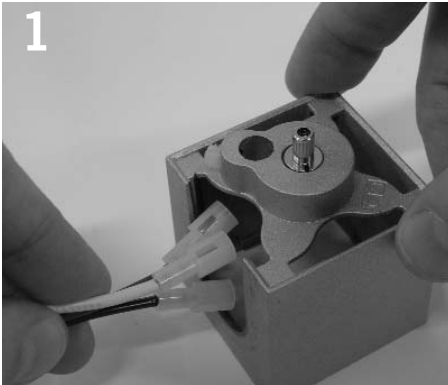

1 Route connection leads into end block.



2 Slide end block onto luminaire body.

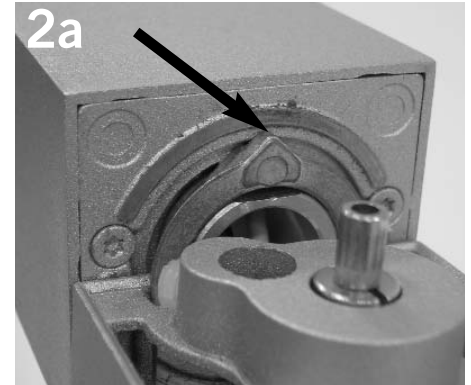


2a NOTE: To attach endblock, arrow on rotation bushing must be oriented away from end block, as shown.




3 Insert individual power feed leads into cord opening on top of end block. NOTE: It may be necessary to feed leads singly through opening.




4 Insert feed cord until jacket is inside cord opening in end block.

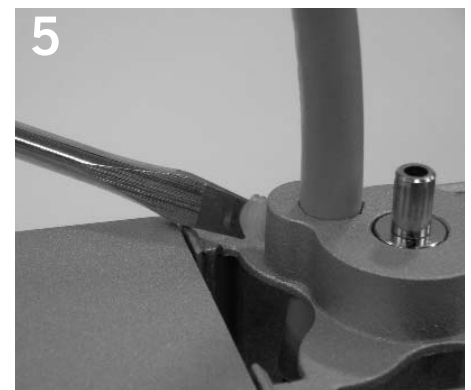

5 Tighten strain relief screw to secure feed cord.

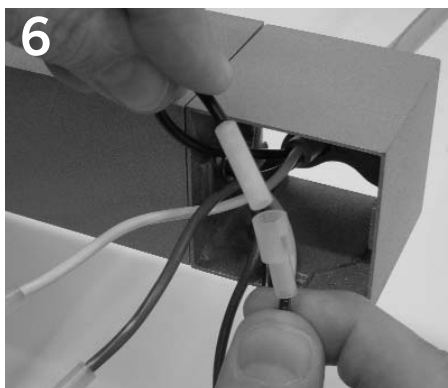

6 Connect like-colored electrical leads. Push connections back into luminaire body.

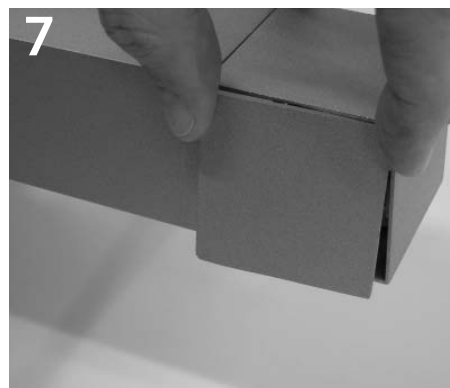


7 Snap end block cover into place. NOTE: See page 5 for Number of Fixtures Per Feed.

Product to be installed by qualified electrician only.


PART #04040646-01 REV .01

NO LIMIT PENDANT


Joining the Fixtures

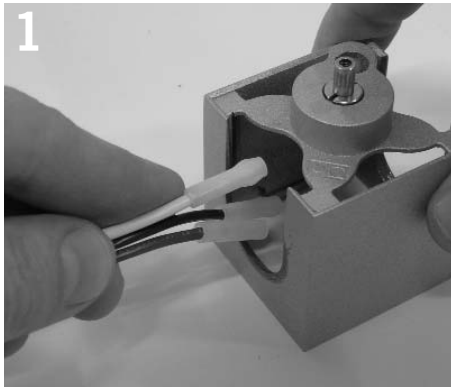


1
Route connection leads into connector block. NOTE: Follow this process for corner connector block, also.

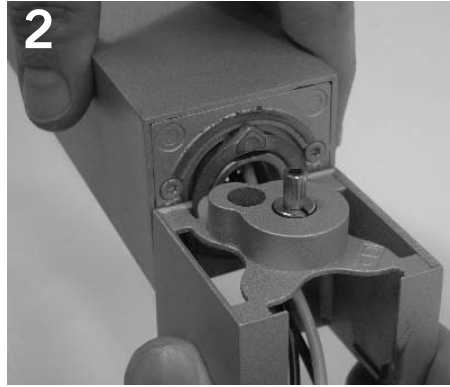


2
Slide connector block onto luminaire body.

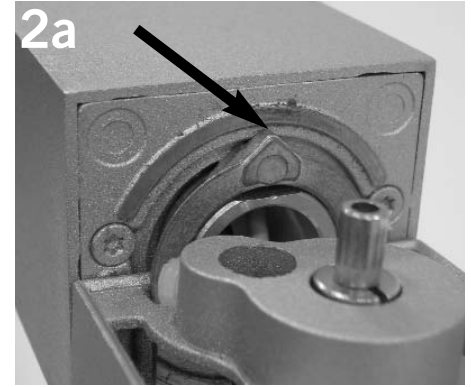


2a
NOTE: To attach connector block, arrow on rotation bushing must be oriented away from connector block, as shown.

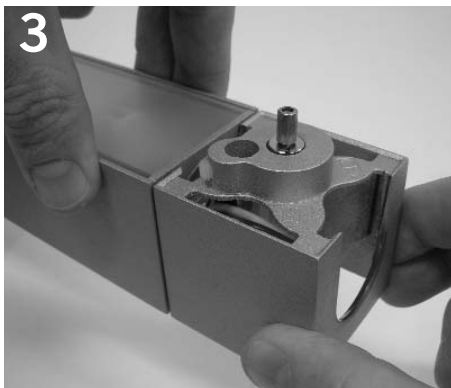

3
Push connector block flush to luminaire body.

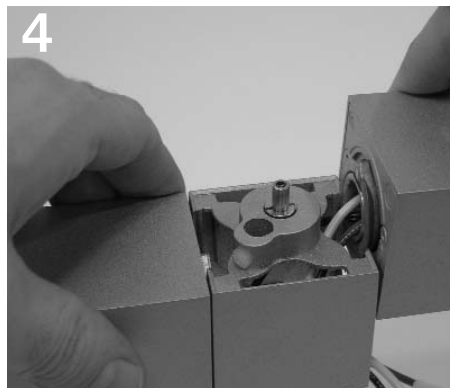

4
Install adjoining luminaire body using described method.

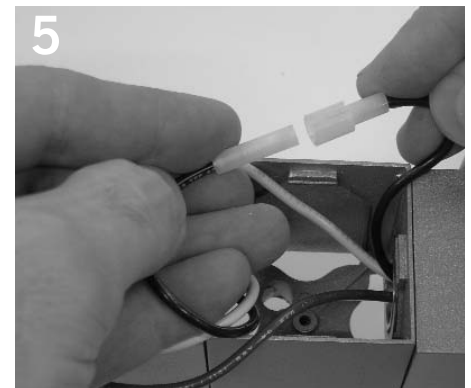

5
Connect like-colored electrical leads. Push connections back into luminaire body.




6
Snap connector block cover into place.

NO LIMIT PENDANT

énergie

Suspending the Fixtures

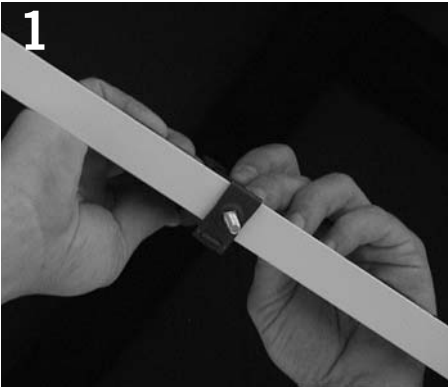


1
Fasten caddy clip around spline.




2
Insert swaged suspension cable through threaded barrel.



3
Secure non-feed canopy to 1/4-20 x 1 1/2" length stud (not provided) with threaded barrel.

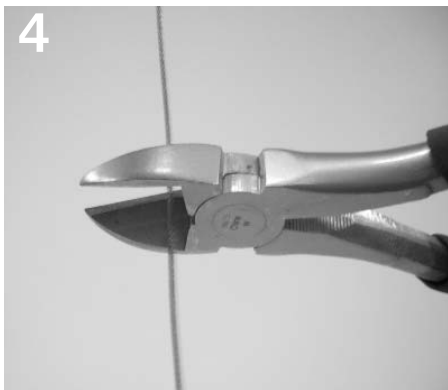

4
Cut suspension cable to length.

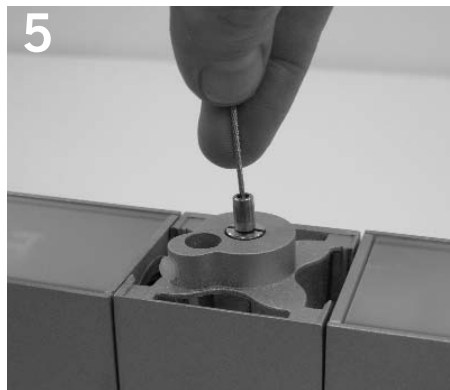

5
Install suspension cable into gripper in connector/ corner/ end block. NOTE: Gripper securing ring may need to be loosened prior to inserting cable.



6
Tighten gripper securing ring.

Product to be installed by qualified electrician only.

PART #04040646-01 REV .01

Installation




1
Remove diffuser and install lamp per relamp label. Replace diffuser.



2
Rotate luminaire body to desired orientation.

NO LIMIT PENDANT, 1-LAMP MOUNTING INFORMATION

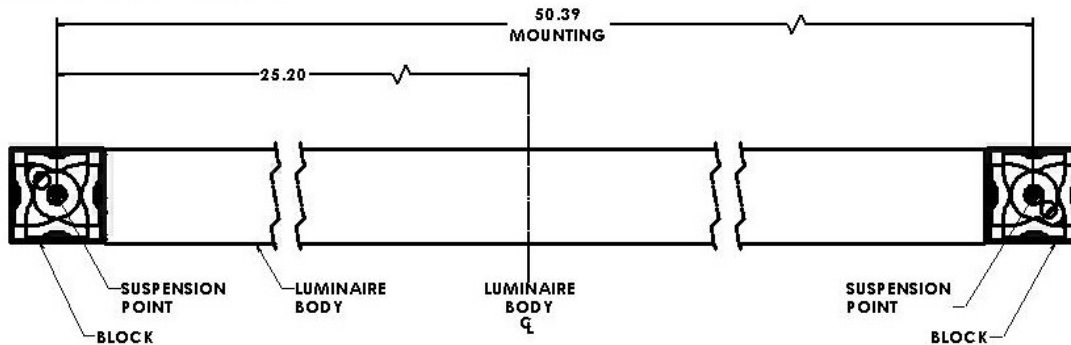

Maximum Run Length Per Feed

LAMPING per 4' SECTION

	(1) T5	(1) T5HO
120 volt	74'	38'


Note: Run lengths based on fixtures with standard ballast. Dimming ballasts, battery packs, separate switching and specified ballasts should be verified by an electrical engineer.

EMC Pendant Mount Feed Kit Installation Instructions



EMC PENDANT FEED KIT CONTENTS:


- One (1) 4-15/16" Ceiling Canopy
- One (1) Plastic Bushing
- One (1) 1/4-20 x 1" Threaded Stud
- One (1) 1/4-20 Internal Thread Barrel Nut
- One (1) 4-3/16" L Cross Bar w/ Ground Screw
- One (1) SJT Cord

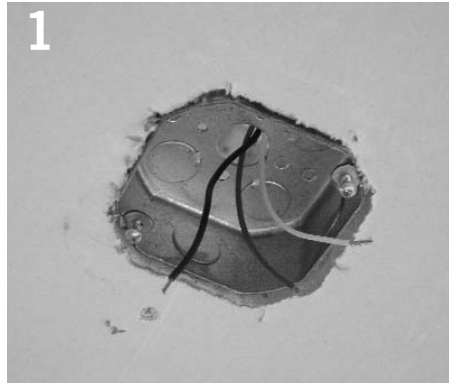

1
Install 4" octagon junction box (not provided) into ceiling.




2
Route EMC feed cord into end block, as shown. NOTE: Process is typical for EMC feed via corner connector or joiner block.

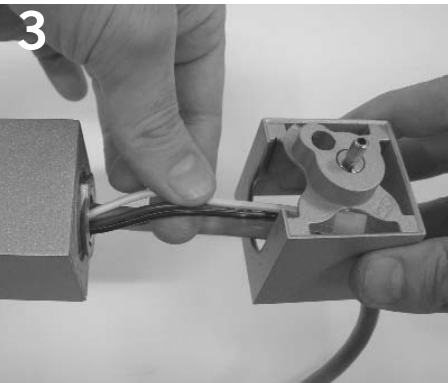

3
Route connection leads into block.




4
Slide end block onto luminaire body.

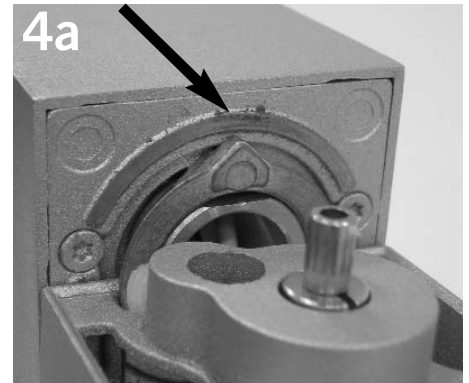

4a
NOTE: To attach end block, arrow on rotation bushing must be oriented away from end block, as shown.



5
Route EMC cord through cord passage in top of block.

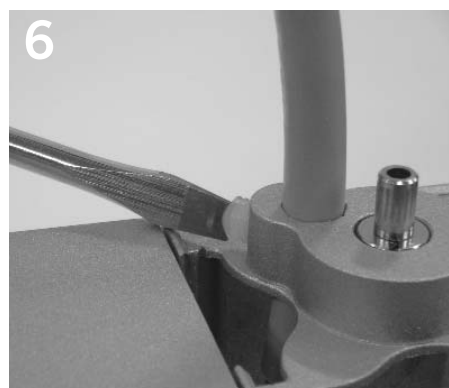

6
Tighten strain relief screw to secure feed cord.



7
Insert bushing into feed canopy.


Product to be installed by qualified electrician only.

PART #04040646-01 REV .01

NO LIMIT PENDANT

énergie

EMC Pendant Mount Feed Kit Installation Instructions continued...

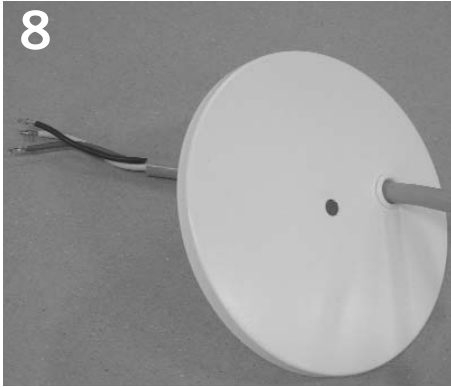


8
Slide power cord through feed canopy and make electrical connections to pre-installed junction box.




9
Insert swaged suspension cable through threaded barrel.




10
Secure feed canopy to 1/4-20 x 1 1/2" length stud with threaded barrel.

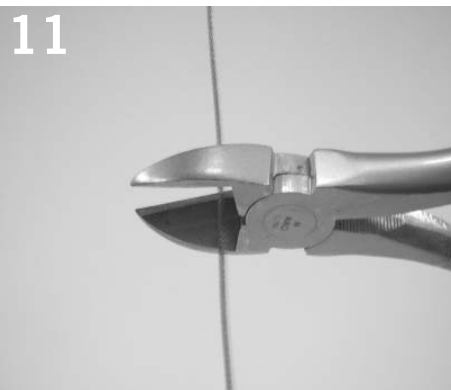


11
Cut suspension cables to length.

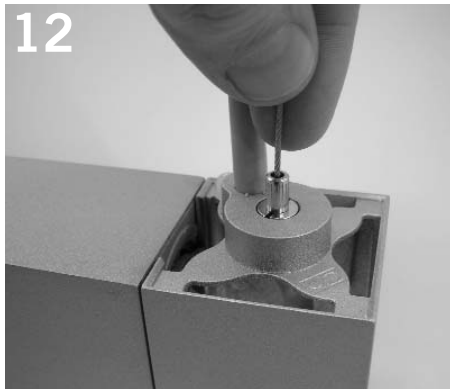


12
Install suspension cable into gripper in block. Tighten gripper securing ring.

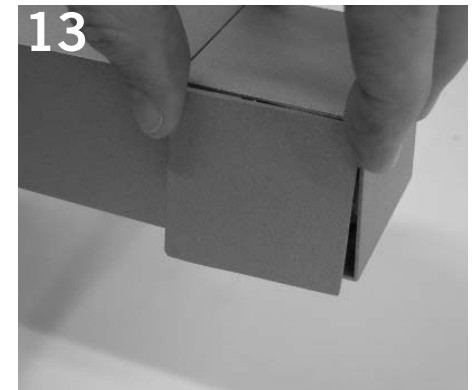

13
Snap end block cover into place.

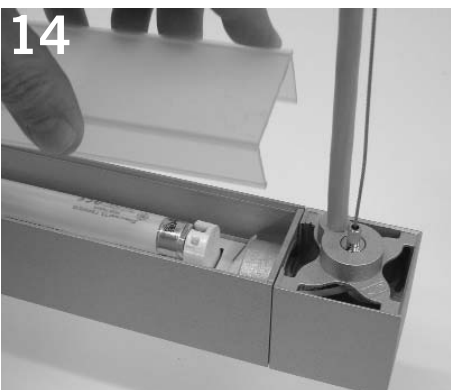

14
Remove diffuser and install lamp per relamp label. Replace diffuser.

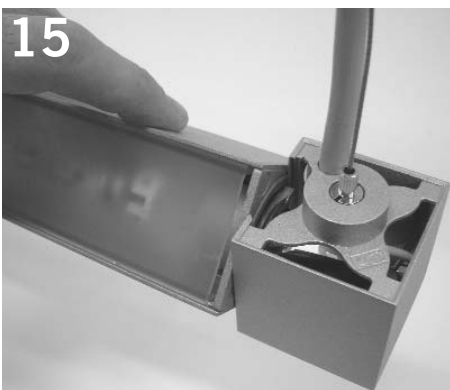

15
Rotate luminaire body to desired orientation.

Product to be installed by qualified electrician only.

PART # 04040646-01 REV .01