

# TOOL

TOOL T8 Asymmetric Wall | Regent Office, Basel, Switzerland | Lighting Design: Regent Lighting | Photograph: Rudolf Zeller

Énergie • 4885 Ward Road, Suite 300 • Wheat Ridge, CO 80033 • Tel 720 963 8055 • [www.energielighting.com](http://www.energielighting.com)

 **REGENT**



TOOL T8 | Morton College, Chicago, IL | Photograph: Becky Wigaspan



TOOL T8 Asymmetric | Künstadademie, Münster, Germany  
Architects: Prof. Raimund A. Beckmann & Prof. Günther Domenig  
Photograph: Rudolf Zeller



LEFT TO RIGHT: TOOL T5 Microperf & TOOL T5 Baffle | Énergie Office, Golden, CO | Photographs: Chris Kokias



## TOOL. Less is (a lot) more.

Designed by Swiss lighting manufacturer Regent, TOOL uses dimensionally matched minimal forms – just a square and a circle – to express light with appealing simplicity. Its versatility is apparent with the addition of reflectors designed to expand the lighting effects.

In its simplest form, TOOL is a high-quality extruded aluminum channel with an exposed fluorescent lamp attached. The look is clean and refined, with precise fit and finish, all hardware concealed. The channel end is proportionally matched to the adjacent anodized aluminum lamp socket cover – a pleasing design detail.

TOOL grants wide variability and creative control to architects and designers. Pendant-, wall-, or ceiling-mounted, TOOL offers an extraordinary capability to highlight architectural features and areas of interest while blending discreetly into a space.




**TOOL T8 Asymmetric** delivers smooth, even lighting for washing walls.



**TOOL T5 Microperf** may be used to create geometric patterns.

## TOOL family. TOOL T5 and TOOL T8.

The TOOL family includes TOOL T8 and TOOL T5 versions in 2-, 3-, and 4-foot lengths. Accessories add a range of light distribution and effects, while the fixtures themselves blend discreetly into a space.

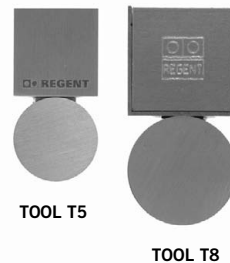


**TOOL T5**


**TOOL T8**




**TOOL T5 Asymmetric Wall** provides smooth, even uplight illumination.




**TOOL T8**




**TOOL T8 Asymmetric**




**TOOL T8 Baffle**




**TOOL T8 Asymmetric Wall**




**TOOL T5**



**TOOL T5 Asymmetric**



**TOOL T5 Baffle**



**TOOL T5 Asymmetric Wall**



**TOOL T5 Microperf**

## TOOL family. Adjustable lengths.

	TOOL	Asymmetric	Baffle	Asymmetric Wall	Microperf Louver
<b>TOOL T8</b>	2', 3', 4'	2', 4'	2', 4'	2', 4'	n/a
<b>TOOL T5</b>	2', 3', 4'	2', 3', 4'	2', 3', 4'	2', 3', 4'	2', 3', 4'

# Product details: TOOL T8.

- Elegant design based on classic geometric forms (circle and square)
- Pendant, ceiling, and wall versions are available
- 2-, 3-, and 4-foot lengths
- Optional asymmetric reflector, asymmetric wall reflector, or baffle
- Dimmable
- Tool T8 is **ADA Compliant**

**CONSTRUCTION** Fixture housing is constructed of extruded aluminum. Endcaps are formed aluminum and lampholder endcaps are milled aluminum.






**FINISH** Body finish is a natural anodized aluminum.

**SHIELDING** Natural aluminum options include baffle reflector, asymmetric reflector, and asymmetric reflector with direct/indirect distribution.

**ELECTRICAL** 120V or 277V. Integral electronic ballast.

**MOUNTING** TOOL T8 Surface fixtures mount over standard octagonal junction box on the ceiling or over an Énergie junction box for wall applications that can be shipped ahead of the fixture. TOOL T8 pendant-mounted versions are supplied with a fully adjustable 72-inch aircraft cable.

See product specification sheets at [www.energielighting.com](http://www.energielighting.com) for complete details.

 DAMP LOCATION LISTED	 <b>TOOL T8</b>	 <b>TOOL T8 Baffle</b>	 <b>TOOL T8 Asymmetric</b>	 <b>TOOL T8 Asymmetric Wall</b>
<b>Catalog Number Prefix</b>	TOL	TLB	TLA	TLW
<b>Mounting</b>	Pendant, Ceiling, Wall	Pendant, Ceiling	Pendant, Ceiling	Wall
<b>Dimmable</b>	Yes	Yes	Yes	Yes
<b>Indirect % / Direct %</b>	30% / 70%	20% / 80%	2% / 98%	91% / 9%
<b>ADA Compliant</b>	Yes	n/a	n/a	No
<b>Lamp</b> (supplied by others)	1x17W T8 (2') 1x25W T8 (3') 1x32W T8 (4')	1x17W T8 (2') 1x32W T8 (4')	1x17W T8 (2') 1x32W T8 (4')	1x17W T8 (2') 1x32W T8 (4')

# Product details: TOOL T5.

- Elegant design based on classic geometric forms (circle and square)
- Reduced profile of T5 fixture is a minimalist design
- Pendant, ceiling, and wall versions are available
- 2-, 3-, and 4-foot lengths
- Optional asymmetric reflector, asymmetric wall reflector, baffle, or microperf shield
- Tool T5 and Tool T5 Microperf are **ADA Compliant**

**CONSTRUCTION** Fixture housing is constructed of extruded aluminum. Endcaps are formed aluminum, and lamp-holder endcaps are milled aluminum.







**FINISH** Body finish is a natural anodized aluminum.

**SHIELDING** Natural aluminum options include baffle reflector, asymmetric reflector, asymmetric reflector with direct/indirect distribution, and anodized aluminum shield with perforation.

**ELECTRICAL** 120V or 277V. Integral electronic ballast.

**MOUNTING** TOOL T5 Surface fixtures mount over standard octagonal junction box on the ceiling, or over an Énergie junction box for wall applications that can be shipped ahead of the fixture. TOOL T5 pendant-mounted versions are supplied with a fully adjustable 72-inch aircraft cable.


See product specification sheets at [www.energielighting.com](http://www.energielighting.com) for complete details.

 DAMP LOCATION LISTED	 <b>TOOL T5</b>	 <b>TOOL T5 Baffle</b>	 <b>TOOL T5 Asymmetric</b>	 <b>TOOL T5 Asymmetric Wall</b>	 <b>TOOL T5 Microperf</b>
<b>Catalog Number Prefix</b>	T5L	T5B	T5A	T5W	T5M
<b>Mounting</b>	Pendant, Ceiling, Wall	Pendant, Ceiling	Pendant, Ceiling	Wall	Pendant, Ceiling, Wall
<b>Dimming</b>	Yes* (remote only)	Yes* (remote only)	Yes* (remote only)	Yes* (remote only)	Yes* (remote only)
<b>Indirect % / Direct %</b>	29% / 71%	47% / 53%	0% / 100%	100% / 0%	37% / 63%
<b>ADA Compliant</b>	Yes	n/a	n/a	No	Yes
<b>Lamp (supplied by others)</b>	1x14W T5 (2') 1x21W T5 (3') 1x28W T5 (4')	1x14W T5 (2') 1x21W T5 (3') 1x28W T5 (4')	1x14W T5 (2') 1x21W T5 (3') 1x28W T5 (4')	1x14W T5 (2') 1x21W T5 (3') 1x28W T5 (4')	1x14W T5 (2') 1x21W T5 (3') 1x28W T5 (4')


\*Consult factory for details about remote dimming.

# Dimensions.


**TOOL T8 PENDANT**

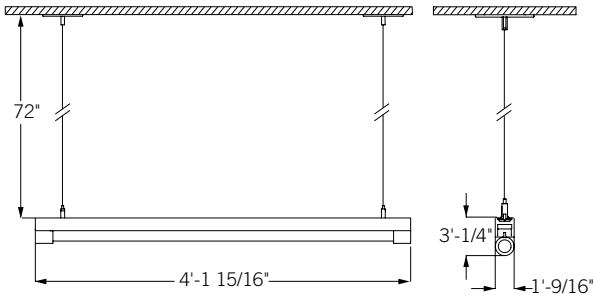


**TOOL T5 PENDANT**

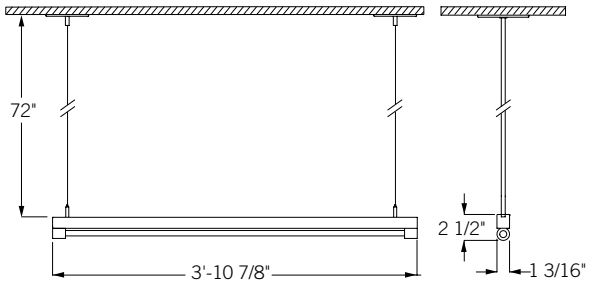


**TOOL T8 CEILING**

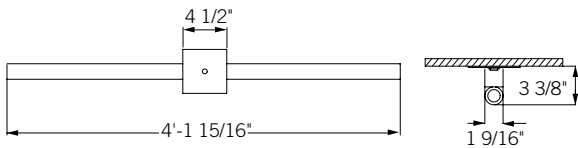

**TOOL T5 CEILING**

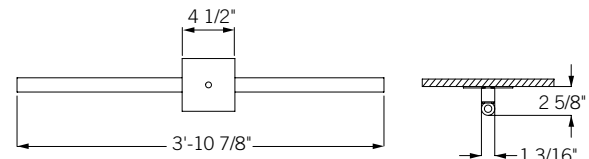

**TOOL T8 WALL**

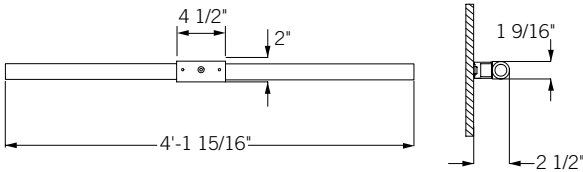

**TOOL T5 WALL**

