



## Installation Instructions




1 Install junction box in wall.

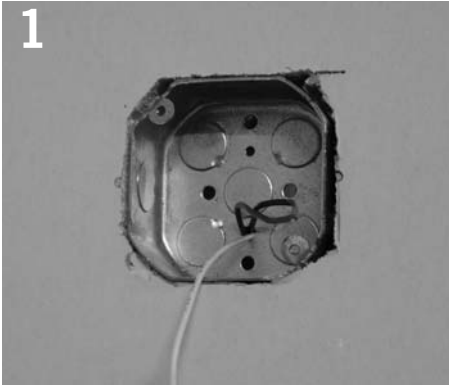

2 Loosen (4) corner screws with wrench provided (5.0mm hex).

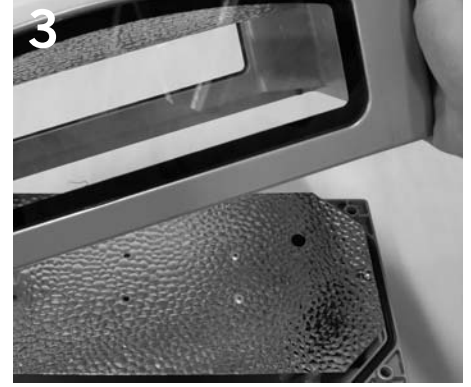

3 Remove fixture cover.

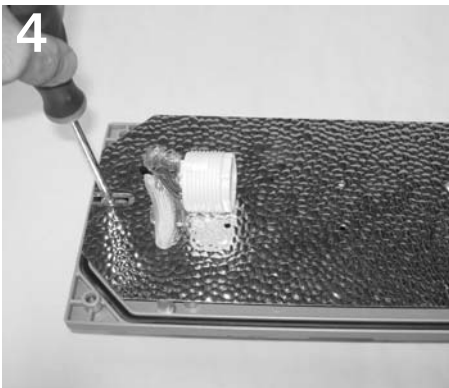


4 Loosen (2) reflector retaining screws.




5 Slide reflector to one side and lift away from lower housing. Reflector will remain tethered via wiring.



6 Remove and retain (2) rubber corner plugs.

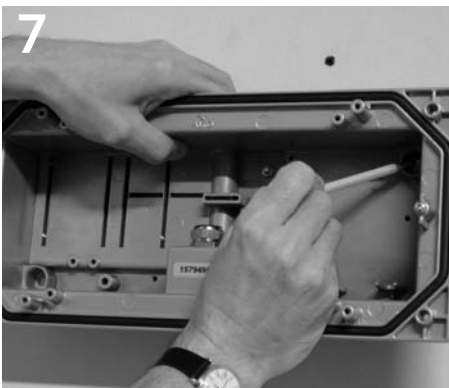

7 Use lower housing to mark mounting hole locations. Mount lower housing to wall. (Note: Reflector removed for clarity; will remain attached)

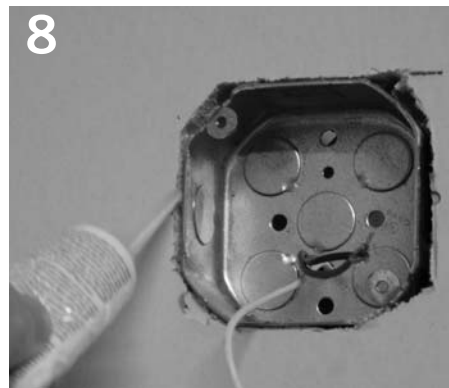

8 If fixture is to be mounted in a wet location, add silicone or similar sealant around edge of junction box.



9 Make electrical connection and push wires back into junction box.


Product to be installed by qualified electrician only.

PART # 04040631-01 Rev.A


## Installation Instructions




Secure fixture to wall.

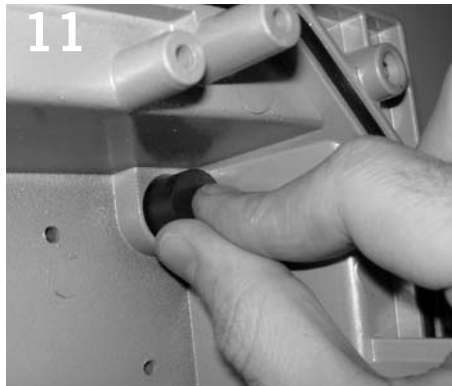

Replace (2) rubber corner plugs. Add silicone sealant if necessary.

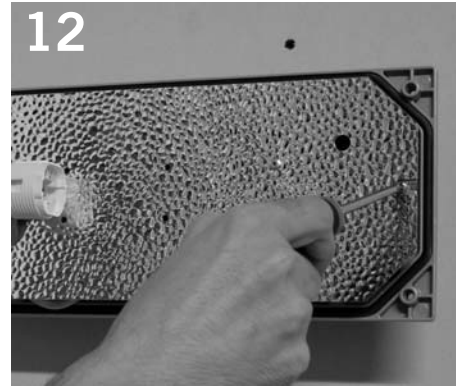

Replace reflector. Secure by tightening (2) retaining screws.

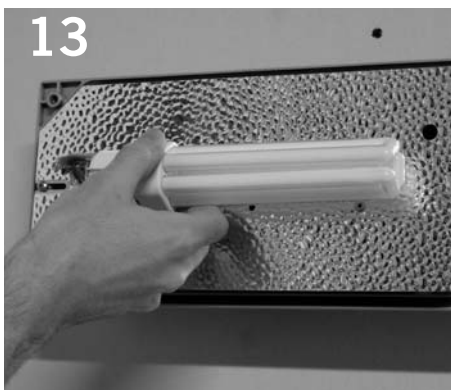

Install lamp as specified on relamp label.



Replace cover and tighten (4) corner screws using wrench provided (5.0mm hex).