

NOLIMIT SQUARE

REGENT

LINEAR



Catalog Number

- FIXTURE**
NLS – NoLimit Square
- LAMPING**
1T528 – (1) 28W T5
1T554 – (1) 54W T5 high output
- VOLTAGE**
120 – 120 Volt
- OPTIONS**
FUS – Integral ballast fusing

EXAMPLE: NLS-1T554-120

Specifications

CONSTRUCTION

Fixture body constructed of aluminum.
Endcaps constructed of die-cast aluminum.
Body of fixture rotates 360 degrees for in-the-field flexibility with a combination of direct, indirect and asymmetric light distribution.
See reverse for details.

FINISH

Fixture finished in thermo painted metallic silver.

SHIELDING

Lamp is shielded by a satin acrylic diffuser.

ELECTRICAL

Specify 120 volt. Fixture and all electrical components are U.L./C.U.L. damp location listed. Supplied with internal electronic ballasts. Fusing may be specified.



LAMPING

(4) 28 watt T5 or 54 watt T5 high output fluorescent lamps. Lamps not included.

MOUNTING


NLS includes all mounting hardware necessary to install the square. Corners are included as shown. Fixtures are supplied with 72" fully adjustable aircraft cable.

Dimensions

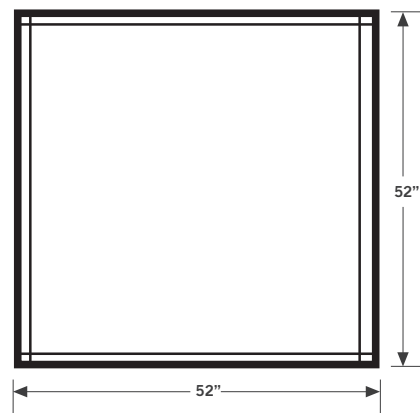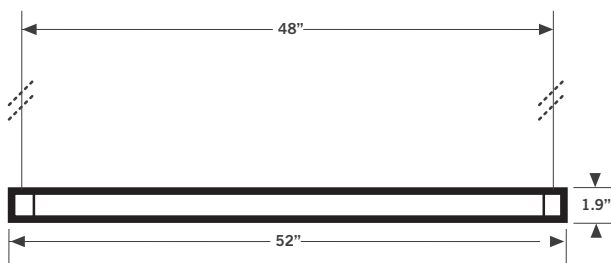


NOLIMIT SQUARE

Details

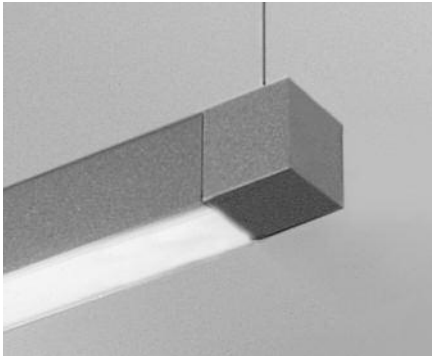

360° ROTATION

NoLimit offers in-the-field flexibility with 360° rotatable centers for direct, indirect or asymmetrical light distribution. End cap cubes made of die-cast aluminum allow the fixtures to connect and serve as the center of rotation.

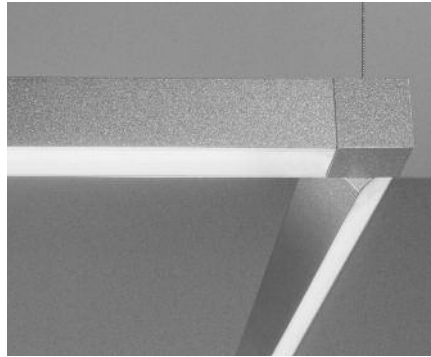

90° CORNER CONNECTOR (NLP-CNR)

Included 90° corner connector is used to create the geometric square pattern and allows 360° rotation.

SEE NOLIMIT PENDANT SPECIFICATION SHEET FOR PHOTOMETRIC INFORMATION.

Installation instructions may be found at www.energielighting.com.