


# NOLIMIT SQUARE

REGENT

LINEAR

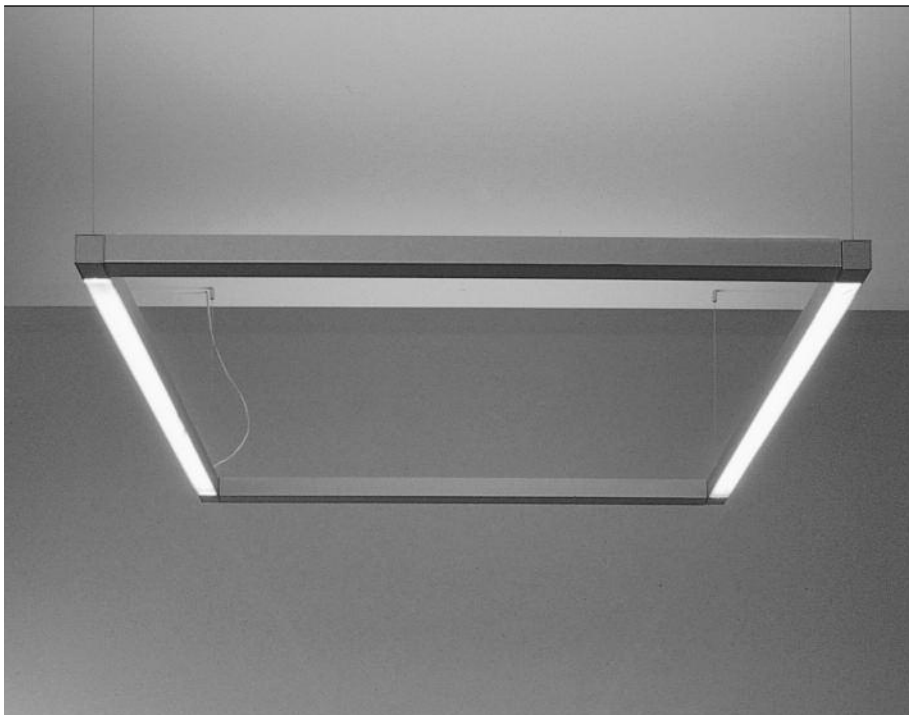

## Catalog Number

- FIXTURE**  
NLS – NoLimit Square
- LAMPING**  
1T528 – (1) 28W T5  
1T554 – (1) 54W T5 high output
- VOLTAGE**  
120 – 120 Volt
- OPTIONS**  
FUS – Integral ballast fusing

**EXAMPLE:** NLS-1T554-120

## Specifications

### CONSTRUCTION

Fixture body constructed of aluminum.  
Endcaps constructed of die-cast aluminum.  
Body of fixture rotates 360 degrees for in-the-field flexibility with a combination of direct, indirect and asymmetric light distribution.  
See reverse for details.

### FINISH

Fixture finished in thermo painted metallic silver.

### SHIELDING

Lamp is shielded by a satin acrylic diffuser.

### ELECTRICAL

Specify 120 volt. Fixture and all electrical components are U.L./C.U.L. damp location listed. Supplied with internal electronic ballasts. Fusing may be specified.



### LAMPING

(4) 28 watt T5 or 54 watt T5 high output fluorescent lamps. Lamps not included.

### MOUNTING


NLS includes all mounting hardware necessary to install the square. Corners are included as shown. Fixtures are supplied with 72" fully adjustable aircraft cable.

## Dimensions

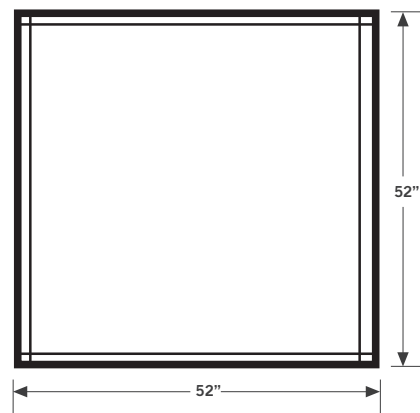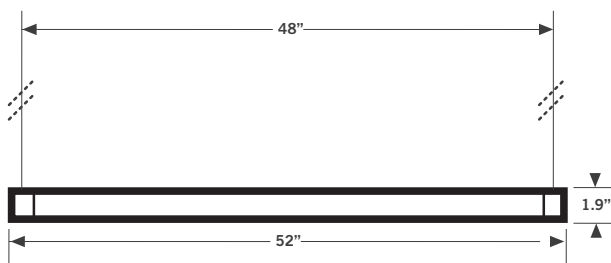


# NOLIMIT SQUARE

## Details

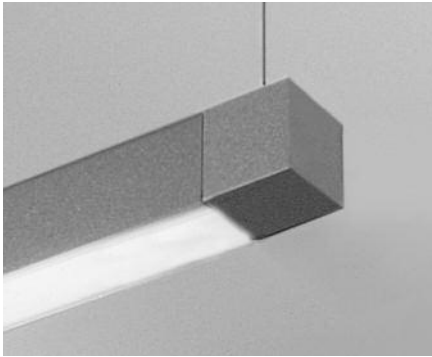

### **360° ROTATION**

NoLimit offers in-the-field flexibility with 360° rotatable centers for direct, indirect or asymmetrical light distribution. End cap cubes made of die-cast aluminum allow the fixtures to connect and serve as the center of rotation.

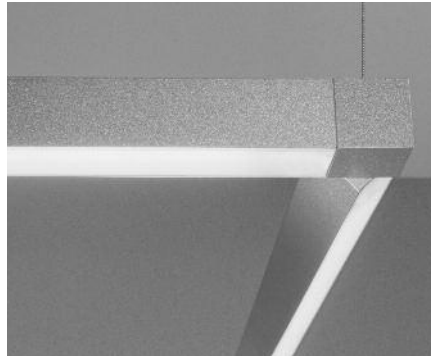

### **90° CORNER CONNECTOR (NLP-CNR)**

Included 90° corner connector is used to create the geometric square pattern and allows 360° rotation.

**SEE NOLIMIT PENDANT SPECIFICATION SHEET FOR PHOTOMETRIC INFORMATION.**

Installation instructions may be found at [www.energielighting.com](http://www.energielighting.com).