



WAVE - HARD CEILING


Installation Instructions

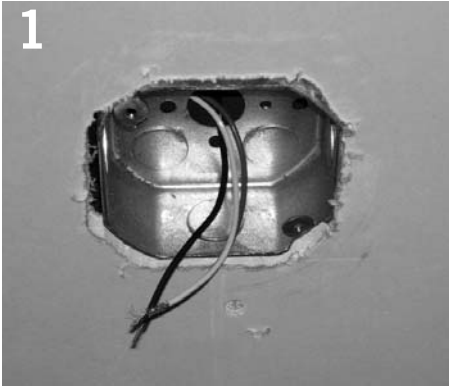

1 Install 4" octagonal junction box (not provided) into ceiling.

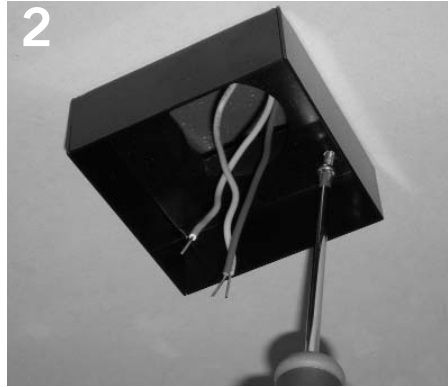

2 Install junction box cover as shown.

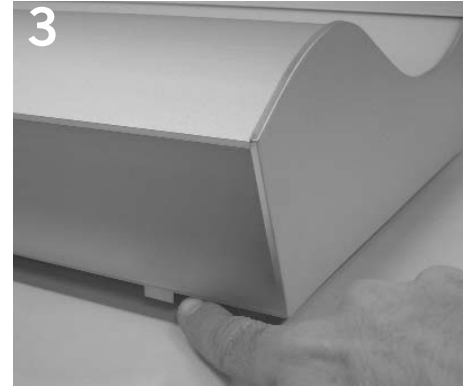


3 Release (2) latches by sliding toward center of luminaire.




4 Open and remove luminaire cover.



5 Loosen - DO NOT REMOVE - (4) screws per reflector.

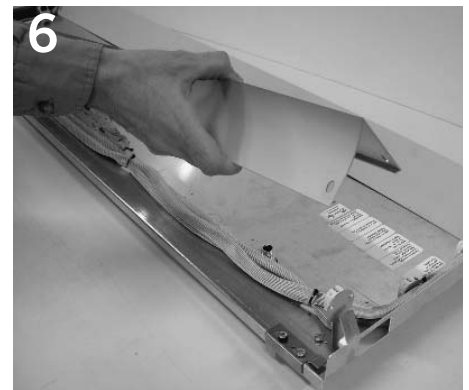

6 Slide reflector to one side and lift. Remove both reflectors.

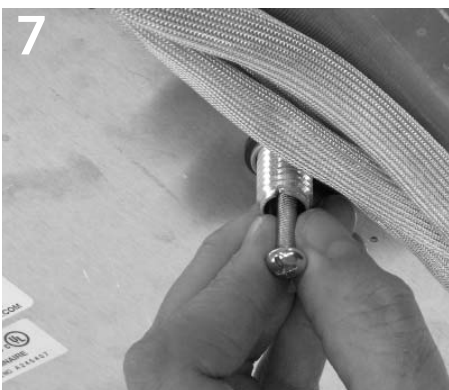

7 Insert screws into (4) feet in base. NOTE: Screws may require slight tap during insertion into foot tube.



8 Secure base to ceiling.



9 Prior to tightening mounting screws, base may be leveled to ceiling by adjusting mounting feet with 13mm wrench (not included).

Product to be installed by qualified electrician only.

PART# 04040661-01 REV .01

WAVE - HARD CEILING

Dimension drawings



10 Make electrical connection. Push wires and connectors back into junction box.



11 Re-install reflectors and tighten screws.
NOTE: Curved side of reflector should face outboard, as shown.



12 Install lamps per relamp label. Replace cover and engage latches.

