




COMET Round 2 | Photograph: Tons Lightology Inc.

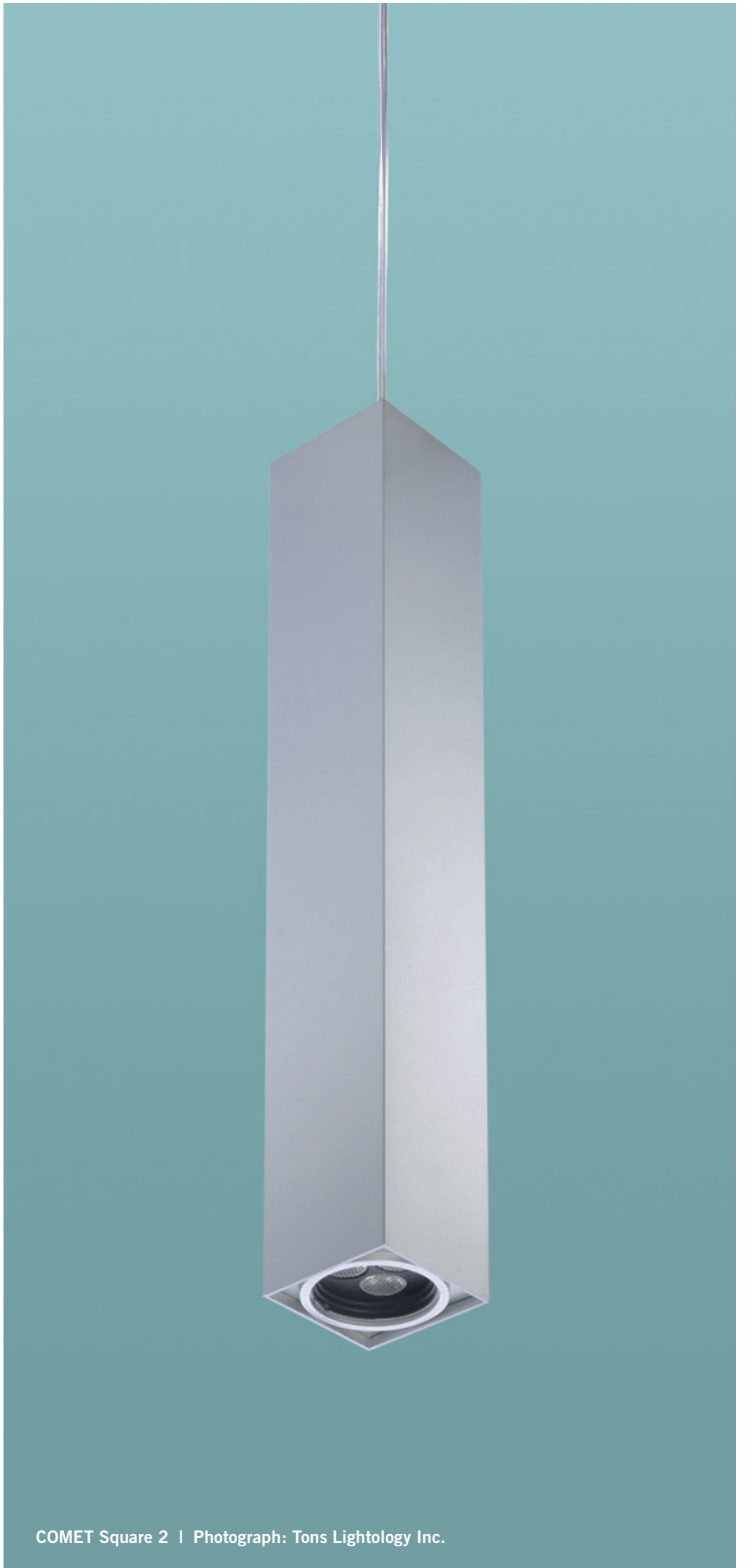

COMET Square 2 | Photograph: Tons Lightology Inc.

# COMET



## COMET. Timeless forms. Timely technology.

COMET's tastefully slim cylindrical and rectangular pendants give specifiers a choice of basic architectural forms, each delivering the same eco-friendly downlight with minimal high-angle glare. Both COMET Round and Square (3-LED fixtures) are available in 10" and 16" lengths. COMET Square 3 extends your choice to a slim 20" fixture and features an acrylic bottom lens for added sparkle in a space. Whether lighting counters, tables, or featured items – in commercial or residential environments – COMET imparts a 20-degree spread of remarkably smooth, symmetrical LED light. Finished in matte silver, COMET pendants coordinate with PILLAR wall-mounted fixtures to offer the same pleasing design aesthetic when illuminating horizontal and vertical surfaces.



COMET Round 1



COMET Round 2



COMET Square 1



COMET Square 2



COMET Square 3

## Product details.

- Round or square shape
- COMET Round/Square 1 is 10" long and COMET Round/Square 2 is 16" long
- Integral black baffle minimizes high-angle glare in COMET Round/Square 1 and 2
- 20" COMET Square 3 has an acrylic bottom lens to add sparkle to a space
- LED color is Warm White (3000K)

<b>CONSTRUCTION</b>	Fixture body and LED housing are constructed of machined aluminum.
<b>FINISH</b>	Fixture is finished in proprietary thermopainted matte silver (RAL9006).
<b>SHIELDING</b>	Integral 20-degree spread lens for each LED chip. In addition, a painted black baffle is included in COMET Round/Square 1 and 2 to minimize high-angle glare. COMET Square 3 includes an acrylic bottom lens.
<b>ELECTRICAL</b>	120V. Integral 3.6W LED driver for COMET Round/Square 1 and 2. 3.6W LED driver for COMET Square 3 is located in the canopy.
<b>MOUNTING</b>	Fixture is mounted to provided canopy with fully adjustable clear power cord. Canopy mounts to a standard octagonal junction box. Maximum cord length is 72".

See product specification sheets at [www.energielighting.com](http://www.energielighting.com) for complete details.


					
	COMET Round 1	COMET Round 2	COMET Square 1	COMET Square 2	COMET Square 3
					
<b>Catalog Number Prefix</b>	CMR1	CMR2	CMS1	CMS2	CMS3
<b>Dimmable</b>	Yes <sup>1</sup>	Yes <sup>1</sup>	Yes <sup>1</sup>	Yes <sup>1</sup>	Yes <sup>1</sup>
<b>Indirect % / Direct %</b>	0% / 100%	0% / 100%	0% / 100%	0% / 100%	0% / 100%
<b>Lamp</b>	(3) 1.2W Osram Oslon LED chips	(3) 1.2W Osram Oslon LED chips	(3) 1.2W Osram Oslon LED chips	(3) 1.2W Osram Oslon LED chips	(1) 1.2W Osram Oslon LED chip
<b>Beam Spread</b>	20-degree lens	20-degree lens	20-degree lens	20-degree lens	20-degree lens
<b>LED Colors Available</b>	Warm White (3000K)	Warm White (3000K)	Warm White (3000K)	Warm White (3000K)	Warm White (3000K)
<b>Light Output (Lumens)</b>	192	192	192	192	41
<b>System Watts</b>	4.8	4.8	4.8	4.8	1.6
<b>Lumens per Watt (Efficacy)</b>	39.8	39.8	39.8	39.8	25.5
<b>CRI</b>	> 80	> 80	> 80	> 80	> 80
<b>LED Rated Life<sup>2</sup></b>	50,000 hours	50,000 hours	50,000 hours	50,000 hours	50,000 hours
<b>Warranty</b>	5 years	5 years	5 years	5 years	5 years

<sup>1</sup>Consult factory concerning dimming availability.


<sup>2</sup>Rated life to 70% lumen output, per LED supplier's data sheet.

# Dimensions.


COMET Round 1

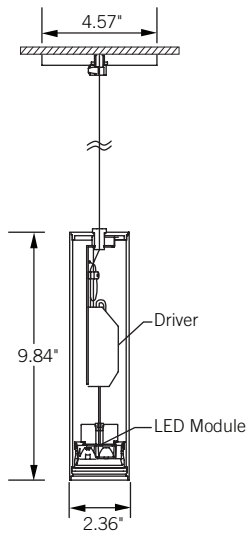


COMET Round 2

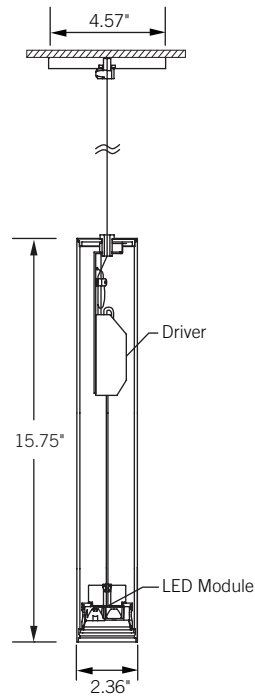

COMET Square 1

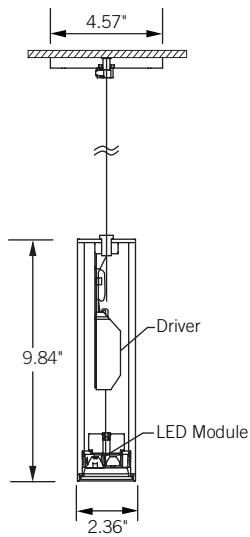

COMET Square 2

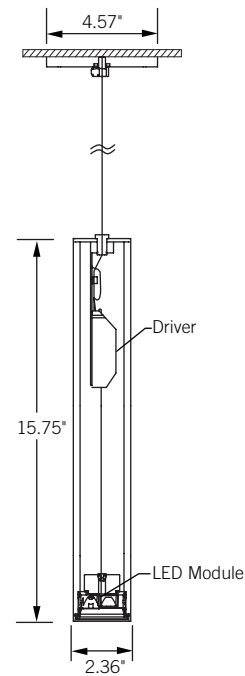

COMET Square 3

